

GVC

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Калининград (4012)72-03-81	Омск (3812)21-46-40	Сыктывкар (8212)25-95-17
Ангарск (3955)60-70-56	Калуга (4842)92-23-67	Орел (4862)44-53-42	Тамбов (4752)50-40-97
Архангельск (8182)63-90-72	Кемерово (3842)65-04-62	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Киров (8332)68-02-04	Пенза (8412)22-31-16	Тольятти (8482)63-91-07
Барнаул (3852)73-04-60	Коломна (4966)23-41-49	Петрозаводск (8142)55-98-37	Томск (3822)98-41-53
Белгород (4722)40-23-64	Кострома (4942)77-07-48	Псков (8112)59-10-37	Тула (4872)33-79-87
Благовещенск (4162)22-76-07	Краснодар (861)203-40-90	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Курск (4712)77-13-04	Рязань (4912)46-61-64	Улан-Удэ (3012)59-97-51
Владикавказ (8672)28-90-48	Курган (3522)50-90-47	Самара (846)206-03-16	Уфа (347)229-48-12
Владимир (4922)49-43-18	Липецк (4742)52-20-81	Саранск (8342)22-96-24	Хабаровск (4212)92-98-04
Волгоград (844)278-03-48	Магнитогорск (3519)55-03-13	Санкт-Петербург (812)309-46-40	Чебоксары (8352)28-53-07
Вологда (8172)26-41-59	Москва (495)268-04-70	Саратов (845)249-38-78	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Мурманск (8152)59-64-93	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Набережные Челны (8552)20-53-41	Симферополь (3652)67-13-56	Чита (3022)38-34-83
Иваново (4932)77-34-06	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54	Якутск (4112)23-90-97
Ижевск (3412)26-03-58	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31	Ярославль (4852)69-52-93
Иркутск (395)279-98-46	Ноябрьск (3496)41-32-12	Ставрополь (8652)20-65-13	
Казань (843)206-01-48	Новосибирск (383)227-86-73	Сургут (3462)77-98-35	
Россия +7(495)268-04-70	Киргизия +996(312)-96-26-47	Казахстан +7(7172)727-132	

DRY STEAM CLEANER SYSTEMS

COMPARISON CHART



PART NUMBER	GVC-18000	GVC-36000
INPUT POWER	22 amps, 230V, 480V, 575V, 60 Hz AC, three phase, Maximum 18,000 W	46 amps, 460-480V, 60 Hz AC, three phase. Maximum 36,000 W
POWER SUPPLY CORD	33', 10-4	33', 6-4
OUTPUT STEAM PRESSURE	Adjustable, 0-145 PSI	Adjustable, 0-145 PSI
OUTPUT STEAM TEMPERATURE	290°F	300°F
OUTPUT STEAM VOLUME	59 lbs/hr	118 lbs/hr
HOSE	33', with pistol grip	33', with pistol grip
WAND	One 20" and one 40" single-piece	One 20" and one 40" single-piece
BOILER(S)	Two 2.4 gallons stainless steel	Four 2.4 gallons stainless steel
WATER TANK	10.6 gallons stainless steel	10.6 gallons stainless steel
CHEMICAL INJECTION	Direct, four level electronic regulation	Direct, four level electronic regulation
CHEMICAL TANK(S)	Two 1.3 gallons	Two 1.3 gallons
SPECIAL FEATURES	Continuous dry steam at 7-9 gallons/hour Adjustable moisture content at 5-15%	Continuous steam at 14 to 18 gallons/hr Adjustable moisture content at 5-15%
DIMENSIONS	48" high x 28" wide x 41" deep	44" high x 28" wide x 41" deep
WEIGHT	194 lbs net dry	225 lbs net dry
ACCESSORIES/ PRICES	See page 96	See page 97



PART NUMBER	GV C-1502	GV C-1502-VAC
INPUT POWER	13 amps, 115V, 50/60 Hz AC, Maximum 1,500 W	15 amps, 115V, 50/60 Hz AC, Maximum 1,800 W
POWER SUPPLY CORD	14', 14-3	14', 14-3
OUTPUT STEAM PRESSURE	Adjustable, 0-90 PSI	Adjustable, 0-90 PSI
OUTPUT STEAM TEMPERATURE	290°F	290°F
OUTPUT STEAM VOLUME	8 lbs/hr	8 lbs/hr
HOSE	8', with pistol grip	10' steam hose, with 2-piece extension wand
WAND	38" two-piece	36" two piece
BOILER(S)	0.6 gallons stainless steel	0.6 gallons stainless steel
WATER TANK	1.3 gallons	1.3 gallons
CHEMICAL INJECTION	Direct	—
CHEMICAL TANK(S)	1.3 gallons	1.3 gallons
SPECIAL FEATURES	Continuous dry steam	Continuous dry steam and vacuum
DIMENSIONS	37" high x 13" wide x 21" deep	36 1/2" high x 15" wide x 24" deep
WEIGHT	57 lbs net dry	62 lbs net dry
ACCESSORIES/ PRICES	See page 98	See page 98

A FASTER WAY TO A GREASE, GRIME AND GERM-FREE PRODUCTION FACILITY



IDEAL FOR

- Conveyor framework
- Flow wrappers & baggers
- Slicers
- Sandwich joints & niche areas
- Motors, conduit, electrical wiring
- Chains
- Diamond plate steps and catwalks
- Conveyor Belts (with automated attachments)

36,000 and 72,000 Watt units also available.

GVC-18000 Continuous Steam Power

The GVC-18000 dry steam cleaner is ideal cleaning equipment for food and beverage production facilities. The machine makes cleaning and sanitizing production and packaging equipment easier, all thanks to its powerful dry steam.

Our system delivers high pressure up to 145 PSI and heat up to 290° F to break down soils like fats, sugars, heavy buildup, and allergens on contact helping you to consistently deliver the results you need as part of your plant SSOPs. It also helps to reduce yeast, mold, pathogenic bacteria, and other dangerous or spoilage microorganisms to an acceptable level.

Plus, dry steam cleaning provides the benefit of targeted cleaning in dry environments, water sensitive equipment, hard to reach areas, and other challenging applications where traditional dry cleaning methods simply can't produce the results you need.


GVC-18000: Heavy-Duty Dry Steam Cleaner, including 33' hose with pistol grip, one-piece 20" wand with detail lance, one-piece 40" wand with detail lance, short detail lance, four 2 1/4" circular nylon brushes, four 2 1/4" circular brass brushes, four 2 1/4" circular stainless steel brushes, four 1 1/2" circular nylon brushes, four 1 1/2" circular brass brushes, four 1 1/2" circular stainless steel brushes, four circular nylon scrubbing brushes, four circular brass scrubbing brushes, four circular stainless steel scrubbing brushes, multi-brush tool, safety glasses, two chemical tanks and a 1 gallon bottle of cleaner.....

FEATURES

- Stainless steel construction
- In operation refillable water tank
- Continuous fill hose connection
- Stainless steel boilers and water tank
- Adjustable dry steam volume
- Steam output at 7-9 gallons/hour (depending on moisture content)
- Adjustable moisture content from 5-15%
- Four chemical-injection settings
- Simultaneous vacuum option available
- Multiple cleaning tools

GVC-18000	
Input Power	22 amps, 230V, 480V, 575V, 50/60 Hz AC, three phase Maximum 18-KW
Power Supply Cord	33', 10-4
Max. Output Steam Pressure	0 up to 145 PSI
Max. Output Steam Temperature	290° F
Boilers	Two 2.4 gallons stainless steel
Output Steam Volume	59 lbs/hr
Water Tank	10.4 gallons stainless steel
Chemical Tanks	Two 1.3 gallons
Dimensions	44" high x 28" wide x 41" deep
Weight	194 lbs net dry

GOODBYE TO DIRT, BACTERIA AND ALLERGENS!

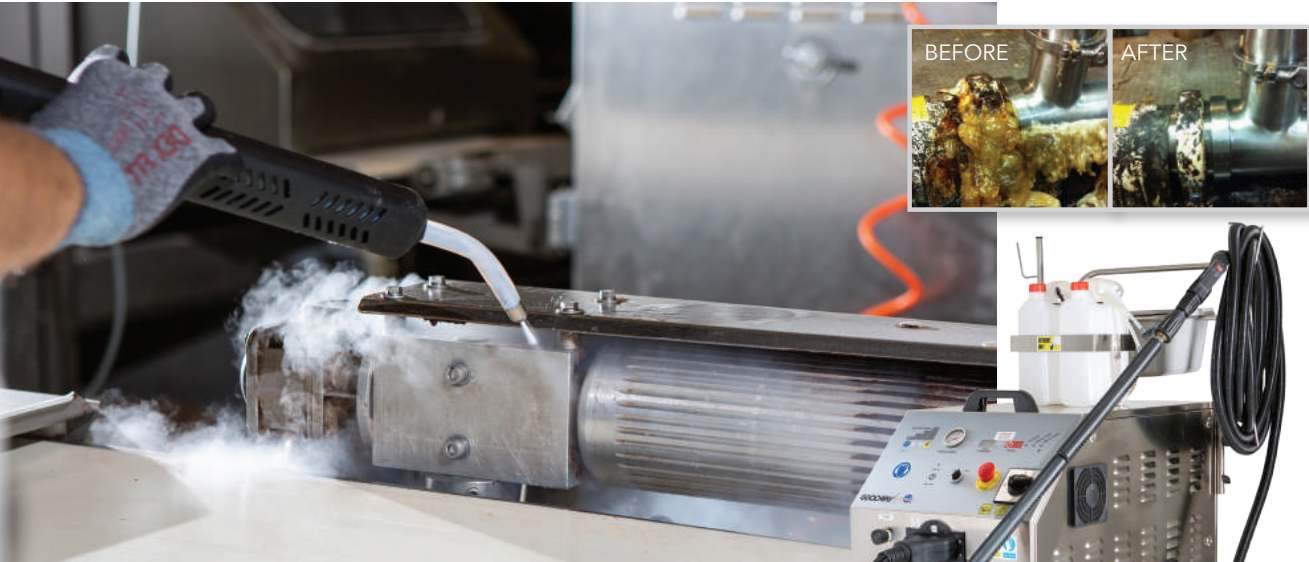

GVC-36000 Heavy-Duty Power with Superior Results

We've paired the convenience of mobility with the power one would expect from a stationary unit. Take on virtually any large scale cleaning project with nearly 0.25 gallons of dry saturated steam per minute.

On demand, industrial strength dry steam eliminates bacteria, viruses and microorganisms. Reduce cleaning time and lower production down time. Clean your facility to the highest level of hygiene available in the cleaning industry. Powerful enough for production lines, yet gentle on machinery and electronics.

- Bakery
- Candy & Confectionery
- Chemical Processing
- Dairy
- Dry Ingredients
- Meat & Poultry Processing
- Pharmaceutical Production
- Produce
- Seafood
- Winery & Brewery

GVC-36000: Heavy-duty dry steam cleaner, including 33' hose with pistol grip, one-piece 20" wand with detail lance, one-piece 40" wand with detail lance, short detail lance, four 2 1/4" circular nylon brushes, four 2 1/4" circular brass brushes, four 2 1/4" circular stainless steel brushes, four 1 1/2" circular nylon brushes, four 1 1/2" circular brass brushes, four 1 1/2" circular stainless steel brushes, four circular nylon scrubbing brushes, four circular brass scrubbing brushes, four circular stainless steel scrubbing brushes, multi-brush tool, safety glasses, four chemical tanks and a 1 gallon bottle of cleaner..... **Call for Price**




FEATURES

- Stainless steel construction
- In operation refillable water tank
- Continuous fill hose connection
- Stainless steel boilers and water tank
- Adjustable dry steam volume
- Steam Output at 14 to 18 gallons/hr (depending on moisture content)
- Adjustable moisture content from 5-15%
- Four chemical-injection settings
- Multiple cleaning tools

GVC-36000

Input Power	46 amps, 460-480V, 60 Hz AC, three phase. Maximum 36-KW
Power Supply Cord	33', 6-4
Max. Output Steam Pressure	Adjustable 0-145 PSI
Max. Output Steam Temperature	290°F
Output Steam Volume	118 lbs/hr
Boilers	Four 2.4 gallons stainless steel
Water Tank	10.6 gallons stainless steel
Chemical Tanks	Two 1.3 gallons
Dimensions	48" high x 28" wide x 43" deep
Weight	225 lbs net dry

POWERFUL CLEANING, SANITATION, AND DISINFECTION

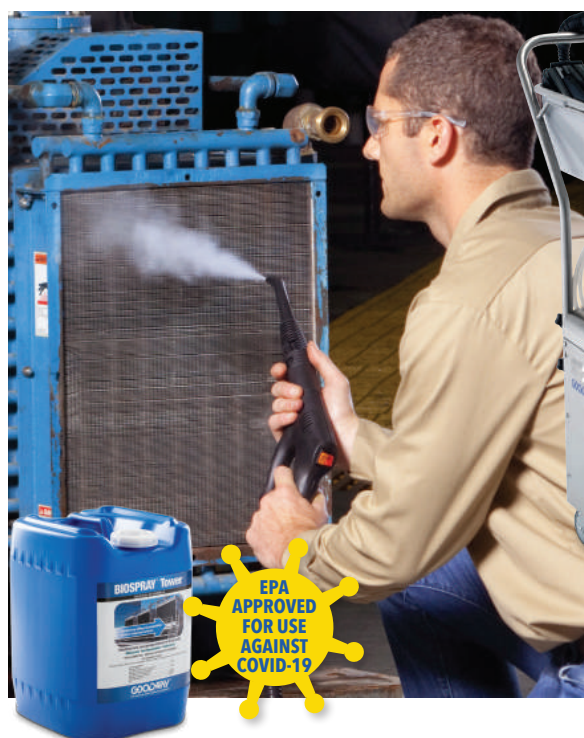

GVC-1502 & GVC-1502-VAC Tough and Effective

For power, portability, and versatility, the GVC-1502 dry steam cleaner is a great choice. It comes in two configurations, with and without integrated wet vacuum for extraction. Use it to clean a large selection of surfaces in a variety of environments, including work tables, seats, carts, beds, carpets, upholstery, desks, door handles and more. All without chemicals and large volumes of water.

The secret is in the ultra-hot vapor steam. Its natural properties explosively loosen dirt, grease, and grime. It doesn't just clean. It also sanitizes your work surfaces. The high heat of the GVC-1502 kills bacteria, fungus, mold, mildew and other microorganisms on contact. An assortment of cleaning tools are included to suit a range of applications.

By design, dry steam uses minimal amounts of water, but for applications where residual water is unacceptable, the GVC-1502-VAC and its integrated vacuum will leave surfaces dry.

FEATURES

- Stainless steel construction
- In operation refillable water tank
- Stainless steel boiler
- Adjustable dry steam volume
- Chemical-injection
- Multiple cleaning tools
- Integrated vacuum

INCLUDES
VACUUM



93-A03368

GVC-1502: Dry steam cleaner, including 8' hose with pistol grip, two-piece 38" wand, 11" floor brush, 5" triangular brush, 9 1/2" squeegee tool, 6 1/2" curved lance, 2" circular nylon brush, three circular nylon scrubbing brushes, three circular copper scrubbing brushes, three circular stainless steel scrubbing brushes, soap container and a 1 gallon bottle of cleaner

GVC-1502-VAC: Includes everything 1502 does, a 10' hose plus a variety of pickup tools to aid extraction. Note this product does not support chemical injection so does not include the soap container and bottle of cleaner

93-A03368: Fogger attachment (not included)

BIOSPRAY-TOWER-5: BIOSPRAY TOWER sanitizer and disinfectant solution kills 99.9% of Legionella, on hard, non-porous surfaces. 5 gallon (19L) container. Also available in 55 gallon drum

	GVC-1502	GVC-1502-VAC
Input Power	13 amps, 115V, 50/60 Hz AC, Maximum 1,500 W	15 amps, 115V, 50/60 Hz AC, Maximum 1,800 W
Power Supply Cord	14', 14-3	14', 14-3
Max. Output Steam Pressure	0 up to 90 PSI	0 up to 90 PSI
Max. Output Steam Temperature	290°F	290°F
Output Steam Volume	8 lbs/hour	8 lbs/hour
Boiler	0.8 gallons stainless steel	0.6 gallons stainless steel
Water Tank	1.3 gallons	1.3 gallons
Chemical Tank	1.3 gallons	-
Dimensions (HxWxD)	37" x 13" x 21"	36 1/2" x 15" x 24"
Weight	57 lbs net dry	62 lbs net dry

Heavy-Duty Industrial Dry Steam Cleaner w/Quad Boilers •

GVC-36000-480



Product Overview

The GVC-36000 portable dry steam generator is a cleaning and sanitation powerhouse. The system generates up to 17.5 gallons of continuous dry steam per hour.

What is dry steam? Dry steam is regular steam that has been superheated and delivers all the cleaning and sanitation power of steam but with much less moisture (adjustable 5%-15% moisture volume). Dry steam can be safely used in dry clean environments or areas where wet cleaning is not recommended.

Use for:

- Production system surface cleaning includes belts, packaging machinery, sorting systems, belt mechanisms, final part cleaning, and many other surfaces.
- Removal of gross soils, oil, and for allergen control
- Also designed for use with Goodway conveyor belt cleaning systems for flat and module belting.

Compact, maneuverable, and very powerful, the GVC-36000 is a commercial heavy-duty, industrial three-phase Dry Steam Cleaner. Quad stainless steel boilers heat tap water from a 10.4-gallon tank - or direct hose connection - producing a variable output pressure of 0-145 PSI and an output temperature of 290°F, obliterating oils, dirt, allergens like sesame seeds and nuts, and bacteria on contact.

This unit produces continuous steam and comes equipped with hoses, vapor-steam gun and attachments, and two chemical tanks for cleaner injection. The system works great as a stand-alone product or with our conveyor belt cleaning systems. A simultaneous vacuum

option is available for advanced cleaning.

What's Included

GVC-36000 Quad Boiler Heavy Duty Dry Steam Cleaner Includes:

Heavy-Duty Dry Steam Cleaner. 53 Amp, 480 V, 60 Hz AC, three-phase. 33' hose with a pistol grip. Two soap containers. Quad stainless steel boilers.

Complete accessory kit including One (1) 20" wand, one (1) 40" wand, four 2-1/4" circular nylon brushes, four 2-1/4" circular brass brushes, four 2-1/4" circular stainless steel brushes, four 1-1/2" circular nylon brushes, four 1-1/2" circular brass brushes, four 1-1/2" circular stainless steel brushes, four circular nylon scrubbing brushes, four circular brass scrubbing brushes, four circular stainless steel scrubbing brushes, multi-brush tool, safety glasses.

Product Features

- Ultra low-moisture dry steam generator
- Stainless steel construction - Long life
- In operation refillable water tank - Continuous steam
- Continuous fill hose connection - Never stop
- Four stainless steel boilers - No depressurization needed after use
- Adjustable moisture content - 5-15% Water content.
- Chemical-injection - Additional cleaning power
- Multiple cleaning tools - Ideal for flat surfaces, cracks, and crevices
- Simultaneous vacuum option - Better cleaning
- CE certified
- Input Power: 480V, 575V, and other configurations available.
- Water Tank: 10.6 gallons
- Chemical Tanks: Two 1.3 gallons
- Boilers: Four, 2.4 gallons each
- Output Steam Pressure: 0-145 PSI
- Output Steam Temperature: 290°F
- Dimensions: 41" high x 28" wide x 43" deep
- Weight: 225 lbs net dry

Heavy-Duty Dry Steam Cleaner w/Twin Boilers •

GVC-18000-480



Product Overview

A favorite for cleaning and sanitizing dry cleaning production areas in food, beverage, and manufacturing plants. Use to remove soils, bacteria, and allergens on conveyor belts, sorting machines, packaging systems, gearing and chains, and all production surfaces. The GVC-18000 is a commercial heavy-duty, industrial three-phase dry steam cleaner that is compact, maneuverable, and very powerful.

What is dry steam? Dry steam is regular steam that has been superheated and delivers all the cleaning and sanitation power of steam but with much less moisture (adjustable 5%-15% moisture volume). Dry steam can be safely used in dry-clean environments or areas where wet cleaning is not recommended.

Use for:

- Production system surface cleaning includes belts, packaging machinery, sorting systems, belt mechanisms, final part cleaning, and many other surfaces.
- Removal of gross soils, oil, and for allergen control
- Also designed for use with Goodway conveyor belt cleaning systems for flat and module belting.

Two stainless steel boilers heat up tap water from a 10.4-gallon tank, producing continuous dry steam with a variable output pressure of 0-145 PSI and an output temperature of 290°F. It obliterates oils, dirt, allergens (like nuts and sesame seeds), and bacteria on contact.

Twin boilers create steam incredibly quickly and give more consistent quality steam and pressure. This unit produces continuous steam at 7-9 gallons per hour. The unit comes

equipped with hoses and vapor-steam gun and attachments, as well as two chemical tanks for cleaner injection. Works great alone or with our portable or fixed conveyor belt cleaning systems. A simultaneous vacuum option is available for advanced cleaning.

What's Included

GVC-18000 Twin Boiler Heavy-Duty Dry Steam Cleaner includes:

Heavy-Duty Dry Steam Cleaner with two boilers, 480 V, 60 Hz AC, three-phase (other power configurations available), 33' hose with a pistol grip, two soap containers, and 1-gallon bottle of high temp cleaner.

Complete accessory kit including One 20" wand, one 40" wand, four 2-1/4" circular nylon brushes, four 2-1/4" circular brass brushes, four 2-1/4" circular stainless steel brushes, four 1-1/2" circular nylon brushes, four 1-1/2" circular brass brushes, four 1-1/2" circular stainless steel brushes, four 1" circular nylon scrubbing brushes, four 1" circular brass scrubbing brushes, four 1" circular stainless steel scrubbing brushes, one pair high temp gloves, one close-range nozzle, one accessory bin, two side panel keys, and safety glasses.

Product Features

- Ultra low-moisture dry steam generator
- Stainless steel construction - Long life
- In operation refillable water tank - Continuous steam
- Continuous fill hose connection - Never stop
- Two stainless steel boilers - No depressurization needed after use
- Adjustable moisture content - 5-15% Water content.
- Chemical-injection - Additional cleaning power
- Multiple cleaning tools - Ideal for flat surfaces, cracks, and crevices
- Simultaneous vacuum option - Better cleaning
- CE Certified
- Input Power: 230V, 480V, 575V, and other configurations available.
- Water Tank: 10.4 gallons
- Chemical Tanks: Two 1.3 gallons
- Boilers: Two, 2.4 gallons each
- Output Steam Pressure: 0-145 PSI
- Output Steam Temperature: 290°F
- Dimensions: 44" high x 28" wide x 41" deep
- Weight: 194 lbs net dry

POWERFUL CLEANING AND SANITATION SOLUTION



GVC-6000 – Tough and Effective

The GVC-6000 Commercial Steam Cleaner is a portable and user-friendly solution for effective cleaning, sanitation, and disinfection in industrial settings. This 230V unit uses tap water to produce dry vapor steam, eliminating dirt, grease, bacteria, and grime with an adjustable pressure of 0-145 PSI and an output temperature of 320°F. The high steam temperature instantly removes oils, grease, and kills bacteria, viruses, mold, and other microorganisms, surpassing traditional chemical disinfectants in speed and efficiency. Plus, the low moisture content of the dry vapor steam, less than 10%, minimizes water residue and requires appropriate cleaning. The unit's chemical injection system enhances cleaning power, while the adjustable pressure ensures optimal visibility during surface cleaning. It is an ideal tool for commercial steam cleaning applications, including industrial equipment and product finishing. The unit comes with various cleaning tools and accessories for versatile use. Choose the GVC-6000 Commercial Steam Cleaner for superior performance in industrial cleaning.....



FEATURES

- The GVC-6000 230V Commercial Steam Cleaner is a portable, easy-to-use solution for powerful cleaning, sanitation, and disinfection.
- It is designed for industrial cleaning.
- The unit produces dry vapor steam using standard tap water, with an adjustable pressure of 0-145 PSI and an output temperature of 320°F.
- It effectively removes dirt, grease, bacteria, and grime from surfaces.
- The high temperature of the steam kills bacteria, fungi, viruses, mold, mildew, and other microorganisms in just a few seconds.
- The unit's chemical injection system provides additional cleaning power.
- The adjustable pressure lets the operator release sufficient vapor steam to clean surfaces without reduced visibility.
- Three-phase power

GVC-6000-230V	
Input Power	13 amps, 230V, 60 Hz AC, three phase
Power Supply Cord	12'
Max. Output Steam Pressure	0 up to 145 PSI
Max. Output Steam Temperature	320° F
Boiler	0.95 gallon stainless steel
Output Steam Volume	19.5 lbs/hr
Water Tank	1.5 gallon stainless steel
Chemical Tanks	Two 1.3 gallons
Dimensions	40" high x 20" wide x 37" deep
Weight	72 lbs net dry

ELIMINATE DOWNTIME WITH CONTINUOUS FILL



- DRY STEAM, PLUS HOT WATER INJECTION
- CONTINUOUS OPERATION
- HEAVY DUTY STAINLESS STEEL CONSTRUCTION

GVC-1250 - Commercial Steam Cleaner

The GVC-1250 boasts an all-stainless steel body and powerful commercial steam cleaning performance. Harness the powerful 1,650-watt boiler that produces a potent torrent of 340° F dry steam to quickly removes oil, grease, dirt and bacteria on contact - without using any chemicals. It includes a variety of accessories to enhance its cleaning performance, including floor tools, wands, brushes, and more. And it offers an easy-read digital interface that allows you to customize your cleaning experience.

The story doesn't end there- this unit also features continuous fill to eliminate down time as well as a hot-water spraying feature for extra stubborn cleaning. Use this unit in commercial kitchens, restaurants, medical environments, health clubs, schools, etc.

FEATURES

- Powerful cleaning performance
- Includes accessory kit for commercial use on surfaces and floors
- Refillable tank for continuous use
- 1650-watt boiler
- Hot water injection for stubborn cleaning needs
- 340° F dry steam
- Chemical-free cleaning
- Eliminates oils and grease - and bacteria - on contact

IDEAL FOR:

- Hotel/Motel
- Healthcare Industry
- Hospitality
- Veterinary Industry
- Restaurant/Food Service
- Rental Properties
- Quick service eateries
- Educational Institutions / Day-Care
- Supermarkets
- Convenience stores



GVC-1250 Steam Cleaner, including Steam Gun and Hose, Nozzle, Filler Bottle, 1" Circular Nylon Brush, 1" Circular Bronze Brush, 2.5" Circular Nylon Brush, 2.5" Circular Bronze Brush, 2.5" Circular Pad Holder, Drain Tool Attachment, Extension Tubes (pair), Rectangular Brush, Rectangular Pad, Triangular Brush, Triangular Pad, 3 Scrubbing Pads, Squeegee, Thermofiber Towel (3-Pack)

GVC-1250	
Boiler power	1,650 W
Steam Production	14.5 lb./hr.
Boiler Temperature	Set1: 186° F, Set2: 220° F, Set3: 225° F
Continuous Use	Yes
Boiler Capacity	0.58 gallons
Steam Output	Electronic Touchpad
Maximum Pressure	105 psi
Out of Water Indicator	Yes
Boiler Material	100% AISI 304 - Stainless steel. (Lifetime warranty against rust)
Power Cord Length	13'
Power	12.8 amps, 120V, 50/60 Hz AC
Dimensions	12" high x 12" wide x 16" deep
Weight	19.6 lbs

STEP UP TO COMMERCIAL CLEANING AND SANITIZING POWER



- COMMERCIAL POWER DRY STEAM
- HEAVY-DUTY CONSTRUCTION



GVC-1100 - Commercial Steam Cleaner

Step up to commercial power with the GVC-1100 model. This unit boasts a powerful 1,650-watt boiler that produces a torrent of 340° F dry steam at up to 105 psi, that quickly removes oil, grease, dirt and bacteria on contact - without using any chemicals. It includes a variety of accessories to enhance its cleaning performance, including floor tools, wands, brushes, and more. And it offers an easy-read digital interface that allows you to customize your cleaning experience.

Use this unit in commercial kitchens, restaurants, medical environments, health clubs, schools, etc.

GVC-1100 Steam Cleaner, including Steam Gun and Hose, Nozzle, Filler Bottle, 1" Circular Nylon Brush, 1" Circular Bronze Brush, 2.5" Circular Nylon Brush, 2.5" Circular Bronze Brush, 2.5" Circular Pad Holder, Drain Tool Attachment, Extension Tubes (pair), Rectangular Brush, Rectangular Pad, Triangular Brush, Triangular Pad, 3 Scrubbing Pads, Squeegee, Thermofiber Towel (3-pack).....

IDEAL FOR:

- Hotel/Motel
- Hospitality
- Restaurant/Food Service
- Quick service eateries
- Supermarkets
- Convenience stores
- Healthcare Industry
- Veterinary Industry
- Rental Properties
- Educational Institutions / Day-Care

FEATURES

- Easy-to-use. Just plug it in and go.
- Chemical-free cleaning
- Eliminates oil, grease and bacteria.
- Includes accessory kit for commercial use on surfaces and floors
- 1650-watt boiler
- 340° F dry steam

GVC-1100	
Boiler power	1,650 W
Steam Production	14.5 lb./hr.
Boiler Temperature	Set1: 205° F, Set2: 216° F, Set3: 225° F
Continuous Use	No
Boiler Capacity	0.58 gallons
Steam Output	Electronic Touchpad
Maximum Pressure	105 psi
Out of Water Indicator	Yes
Boiler Material	100% AISI 304 - Stainless steel. (Lifetime warranty against rust)
Power Cord Length	13'
Power	12.5 amps, 120V, 50/60 Hz AC
Dimensions	12" high x 12" wide x 16" deep
Weight	15.3 lbs

SMALL AND MIGHTY – BLAST OUT GREASE AND GRIME



• PORTABLE AND ECONOMICAL

GVC-390 - Portable Steam Cleaner

Small but mighty, this compact vapor steam cleaning and sanitizing system uses the grease and bacteria-busting power of dry steam to quickly clean various surfaces without chemicals. The unit is easy-to-use. Just plug it in and go. Plus, it uses a simple lighting system to tell you when the unit is on or needs a refill! GVC-390 comes with a selection of accessories and a long hose, making it the perfect system for cleaning hotel rooms, bathrooms, eliminating bed bugs and pests, small equipment, production surfaces, and more.

The power of dry steam is the secret sauce to cleaning without chemicals. A powerful 1700-watt boiler produces 311° F dry steam that obliterates oils, grease – and bacteria – on contact.

GVC-390 Steam Cleaner, including Steam Gun and Hose, Nozzle, Filler Bottle, 1" Circular Nylon Brush, 1" Circular Bronze Brush, 2.5" Circular Nylon Brush, Drain Tool Attachment, Extension Tubes (pair), Rectangular Brush, Rectangular Pad, Triangular Brush, Triangular Pad, Squeegee, Thermofiber Towel (3-Pack)

IDEAL FOR:

- Hotel/Motel
 - Hospitality
 - Restaurant/Food Service
 - Quick service eateries
 - Supermarkets
 - Convenience stores
- Healthcare Industry
 - Veterinary Industry
 - Rental Properties
 - Educational Institutions / Day-Care
 - Pest Control

FEATURES

- Easy-to-use. Just plug it in and go.
 - Chemical-free cleaning
 - Eliminates oils and grease – and bacteria – on contact
- Includes accessory kit for surfaces and floors
 - 1700-watt boiler
 - 311° F dry steam

GVC-390	
Boiler power	1,700 W
Steam Production	11 lb./hr.
Boiler Temperature	215° F
Continuous Use	No
Boiler Capacity	0.65 gallons
Steam Output	Electronic - low/med/high
Maximum Pressure	56 psi
Out of Water Indicator	Yes
Boiler Material	AISI 304
Power Cord Length	13'
Power	13 amps, 120V, 60 Hz AC
Dimensions	10" high x 10.5" wide x 17.5" deep
Weight	11 lbs

По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Калининград (4012)72-03-81	Омск (3812)21-46-40	Сыктывкар (8212)25-95-17
Ангарск (3955)60-70-56	Калуга (4842)92-23-67	Орел (4862)44-53-42	Тамбов (4752)50-40-97
Архангельск (8182)63-90-72	Кемерово (3842)65-04-62	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Астрахань (8512)99-46-04	Киров (8332)68-02-04	Пенза (8412)22-31-16	Тольятти (8482)63-91-07
Барнаул (3852)73-04-60	Коломна (4966)23-41-49	Петрозаводск (8142)55-98-37	Томск (3822)98-41-53
Белгород (4722)40-23-64	Кострома (4942)77-07-48	Псков (8112)59-10-37	Тула (4872)33-79-87
Благовещенск (4162)22-76-07	Краснодар (861)203-40-90	Пермь (342)205-81-47	Тюмень (3452)66-21-18
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Ростов-на-Дону (863)308-18-15	Ульяновск (8422)24-23-59
Владивосток (423)249-28-31	Курск (4712)77-13-04	Рязань (4912)46-61-64	Улан-Удэ (3012)59-97-51
Владикавказ (8672)28-90-48	Курган (3522)50-90-47	Самара (846)206-03-16	Уфа (347)229-48-12
Владимир (4922)49-43-18	Липецк (4742)52-20-81	Саранск (8342)22-96-24	Хабаровск (4212)92-98-04
Волгоград (844)278-03-48	Магнитогорск (3519)55-03-13	Санкт-Петербург (812)309-46-40	Чебоксары (8352)28-53-07
Вологда (8172)26-41-59	Москва (495)268-04-70	Саратов (845)249-38-78	Челябинск (351)202-03-61
Воронеж (473)204-51-73	Мурманск (8152)59-64-93	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Екатеринбург (343)384-55-89	Набережные Челны (8552)20-53-41	Симферополь (3652)67-13-56	Чита (3022)38-34-83
Иваново (4932)77-34-06	Нижний Новгород (831)429-08-12	Смоленск (4812)29-41-54	Якутск (4112)23-90-97
Ижевск (3412)26-03-58	Новокузнецк (3843)20-46-81	Сочи (862)225-72-31	Ярославль (4852)69-52-93
Иркутск (395)279-98-46	Ноябрьск (3496)41-32-12	Ставрополь (8652)20-65-13	
Казань (843)206-01-48	Новосибирск (383)227-86-73	Сургут (3462)77-98-35	
Россия +7(495)268-04-70	Киргизия +996(312)-96-26-47	Казахстан +7(7172)727-132	